


Secure Elegance Hook And Latch Rail Alignment

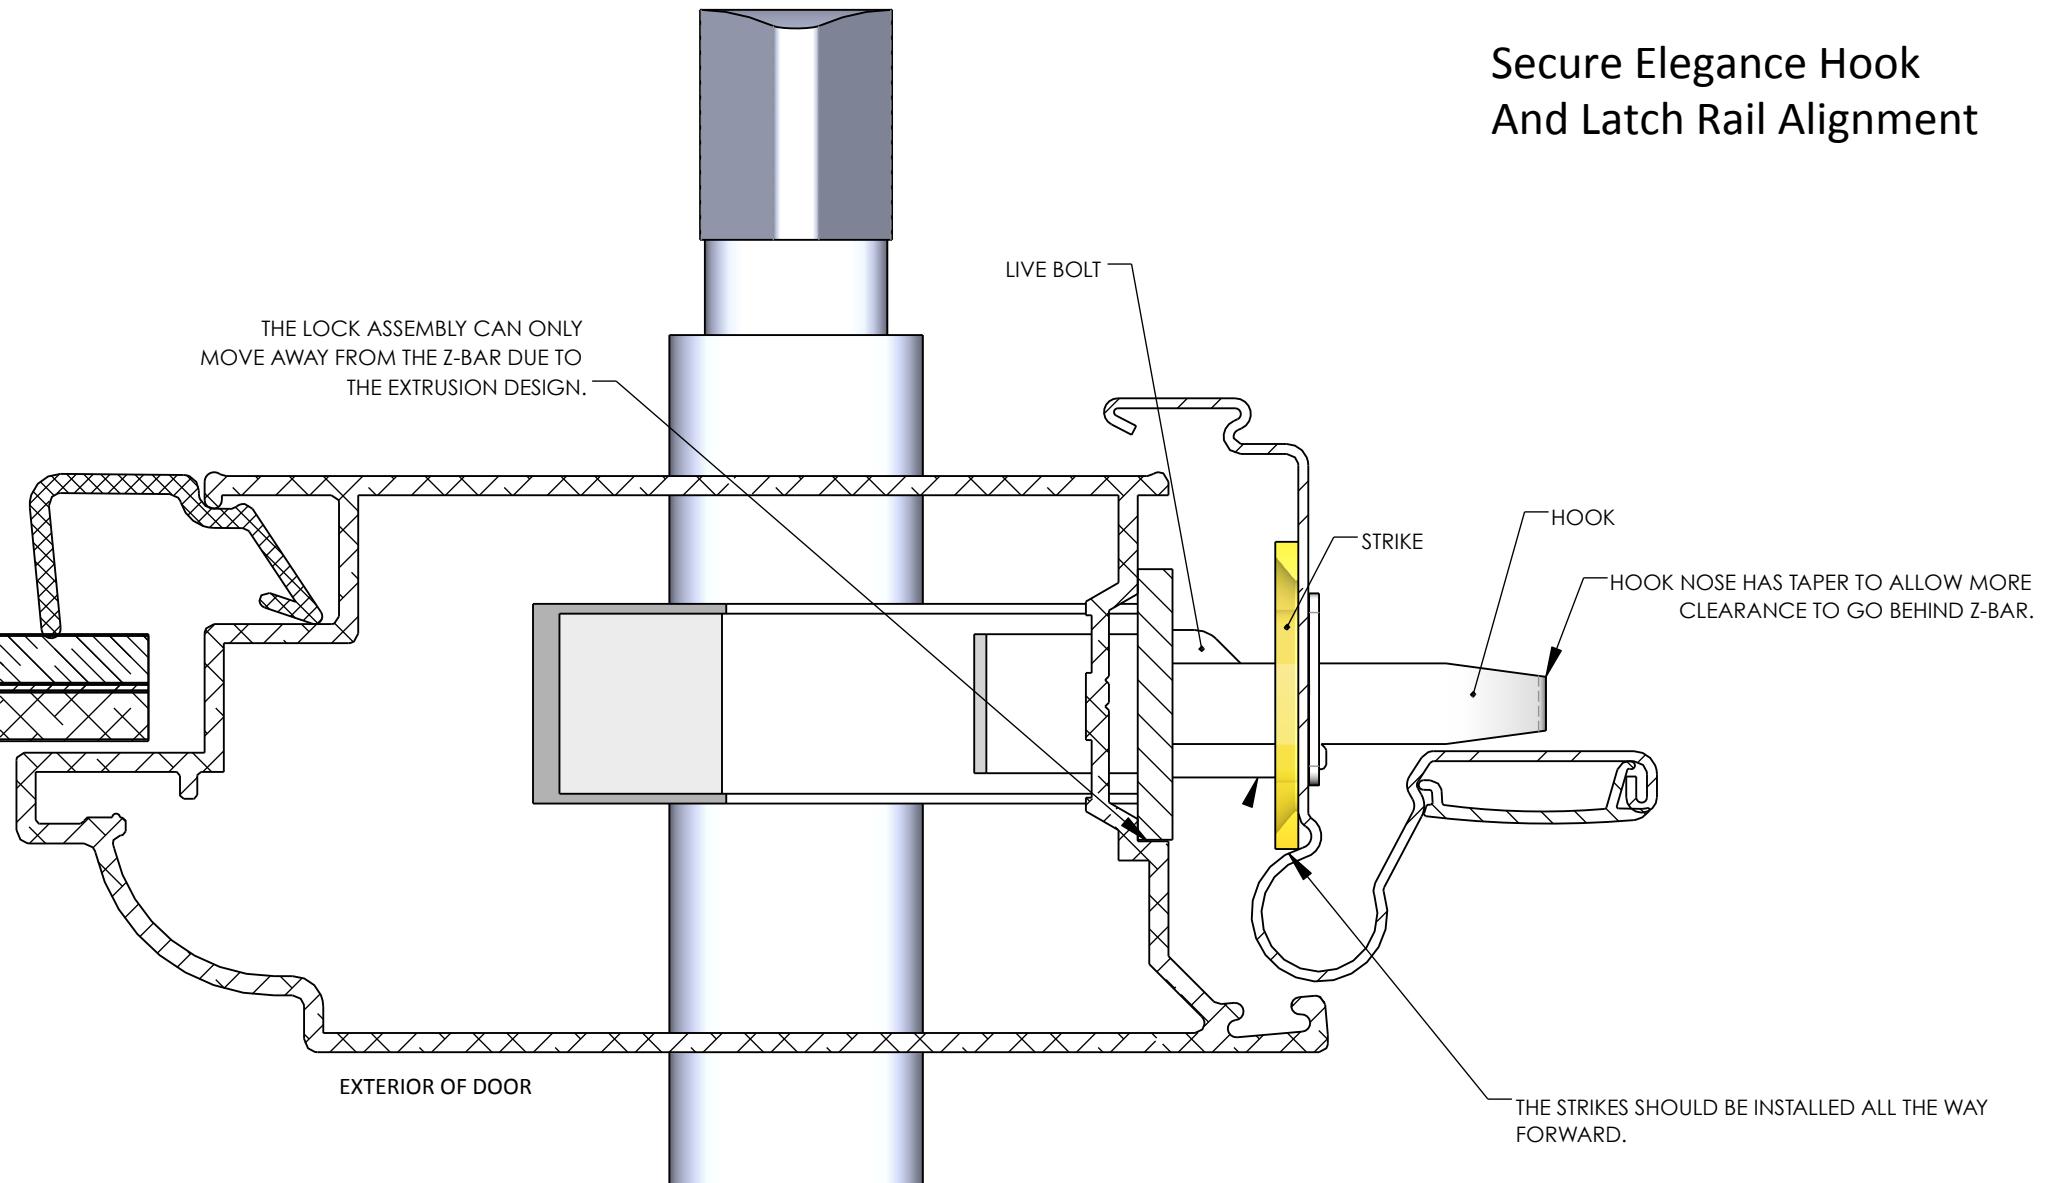

- Mounting Rails need to rest securely on the brick mold and both require a 1" x 1" flat mounting surface. If the surface is not 1" x 1" and flat, the Latch Rail can twist/bend when the installation screws are fastened and interfere with the hooks.
- Latch Strike Plate needs to be installed all the way forward and touch the bull nose (rounded edge) of the Latch Rail.
- Clear out the wood in the jamb until the hooks can throw freely.

TOP, DOWN VIEW OF LEFT HINGE DOOR